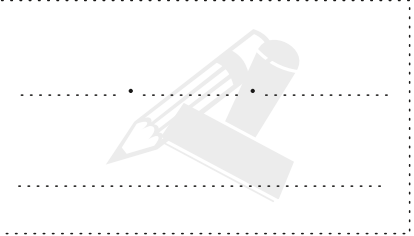




DIN EN 806
DIN EN 1717
DIN 1988

Global Standards





°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F


✓ 3 bar / 43,5 psi

min. 1 bar / 14,5 psi

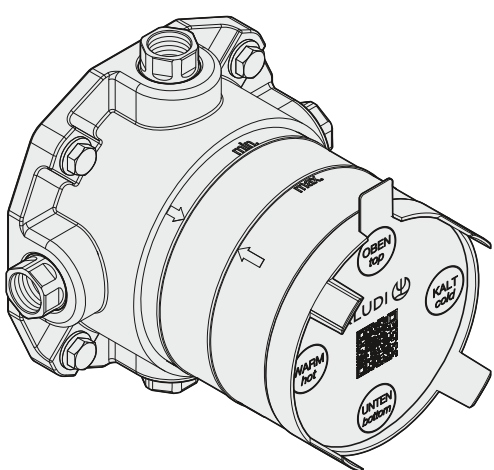
max. 10 bar / 145 psi

3 min.

max. 70 °C / 158 °F



- Ⓓ Montage- und Bedienanleitung
- ⒸⓃ 安裝及操作指南
- ⒸⓏ Návod k instalaci a k použití
- Ⓔ Instrucciones de montaje y de manejo
- ⒺⓈ Paigaldamine ja kasutamine
- Ⓕ Instructions de montage et d'utilisation
- ⒼⒹ Installation and operating instructions
- ⒼⓇ ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- Ⓕ Szerelési és használati utasítás
- Ⓘ Istruzioni di montaggio e per l'uso
- ⒻⓉ Montavimo ir naudojimo instrukcija
- ⒻⓂ Montāžas un lietošanas instrukcija
- ⒼⓁ Montagehandleiding en Gebruiksaanwijzing
- ⒼⓁ Instrukcja montażu i obsługi
- ⓇⓄ Instrucțiuni de montaj și utilizare
- ⓇⓊⓈ Руководство по монтажу и эксплуатации
- ⓈⓀ Návod na montáž a obsluhu
- ⓈⓁⓄ Navodila za montažo in uporabo
- Ⓤⓐ Інструкція по монтажу та експлуатації
- Ⓤⓐⓔ تعليمات التركيب والتشغيل

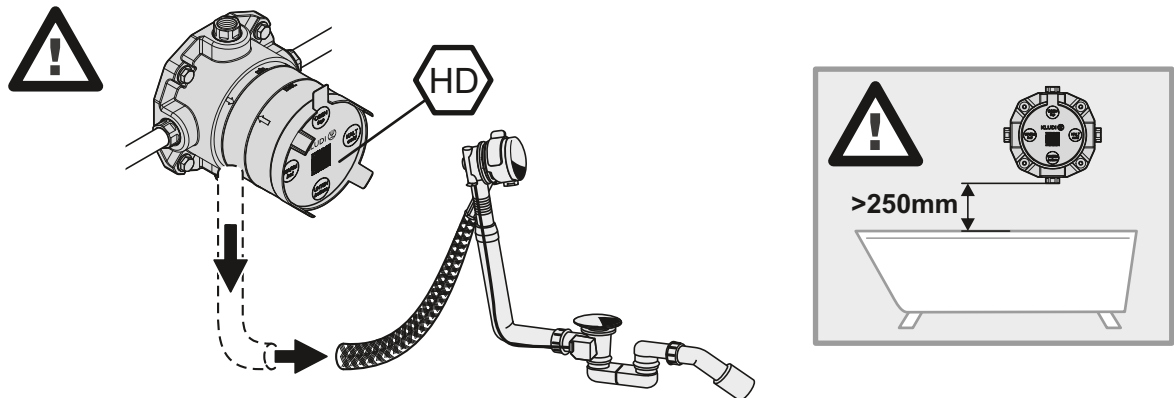
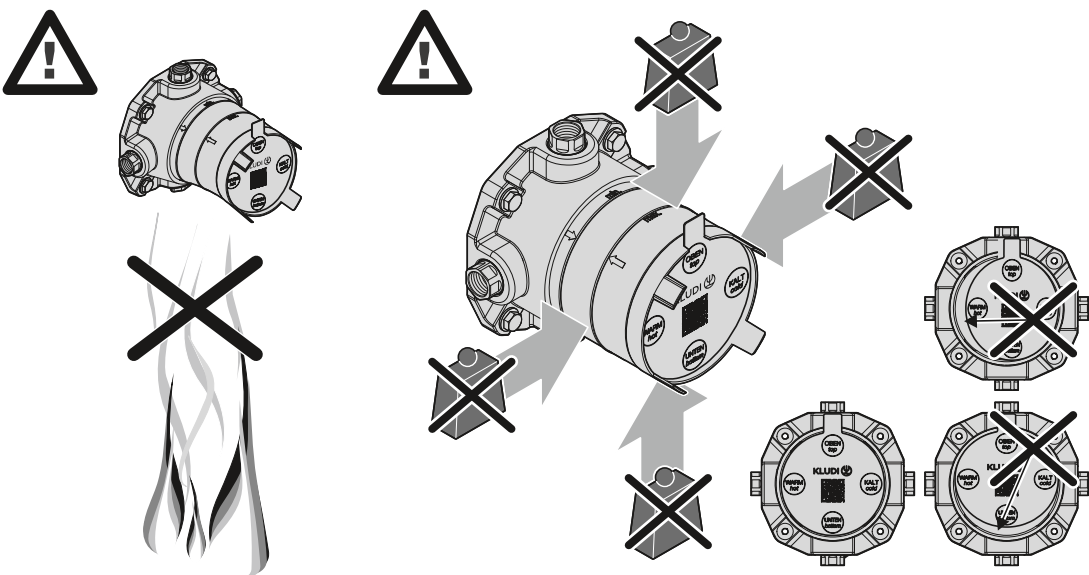






Kludi GmbH & Co. KG
Postfach 25 60
D-58685 Menden
Am Vogelsang 31-33
D-58706 Menden










Telefon: (D) +49 (0) 23 73 / 904-0
Telefax: (D) +49 (0) 23 73 / 904-4 65
E-Mail: info@kludi.de
Internet: www.kludi.com

KLUDI 

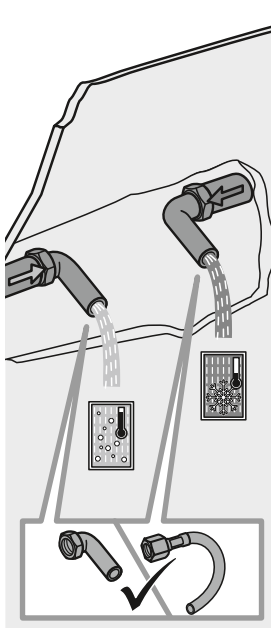
✂ Montageschablone



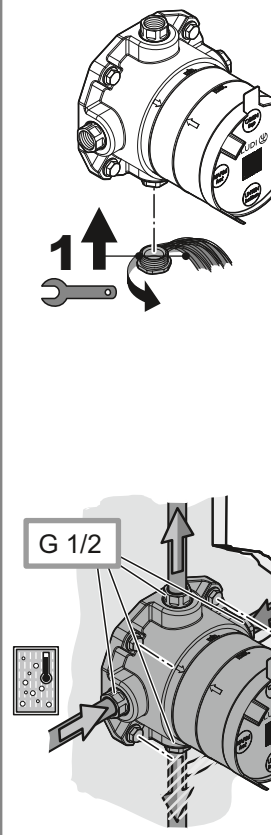
KLUDI Serien				
				
HD xx763xx	xx759xx	xx755xx	xx810xx	xx885xx
●	●		●	
●	●		●	
	●		●	
	●		●	
	●		●	
		●		●


1.



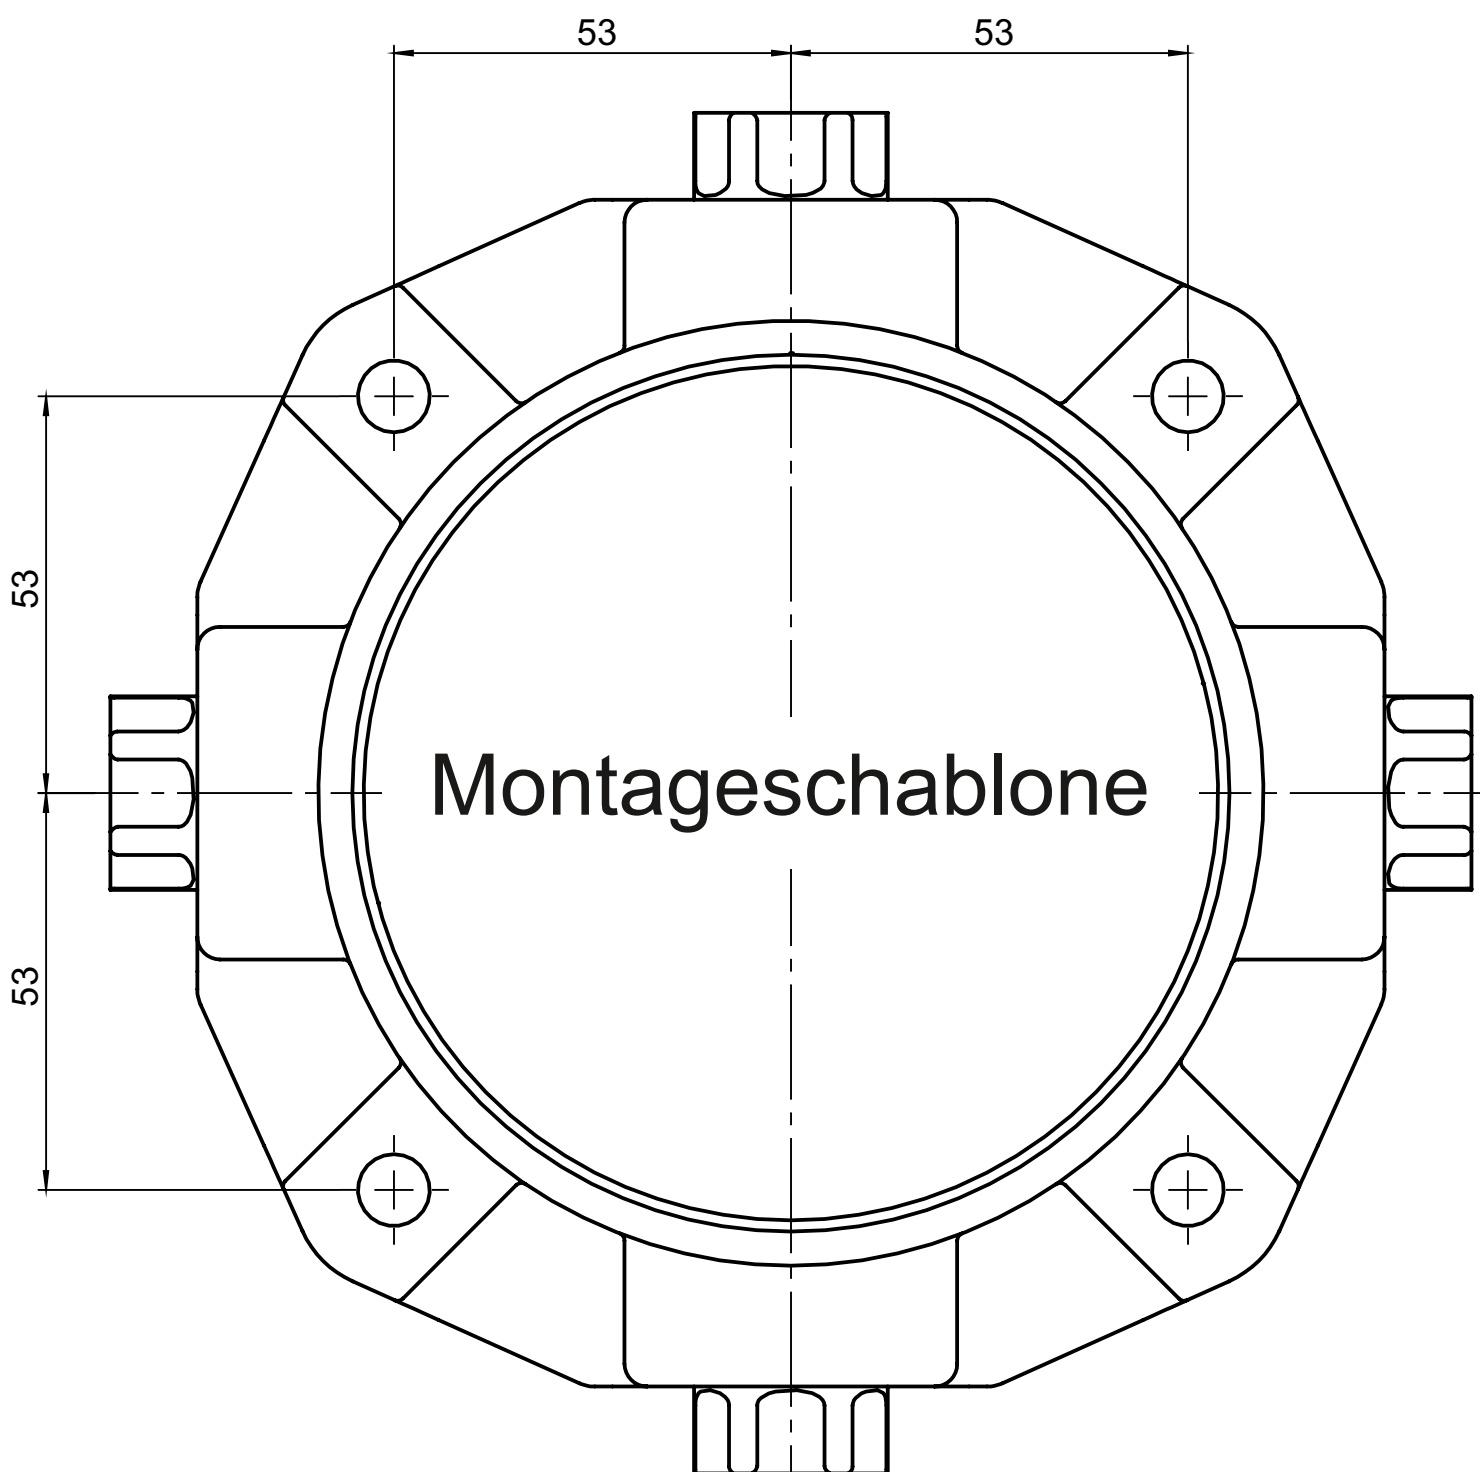
2.



3 (4x)



Montageschablone



Montageschablone

