

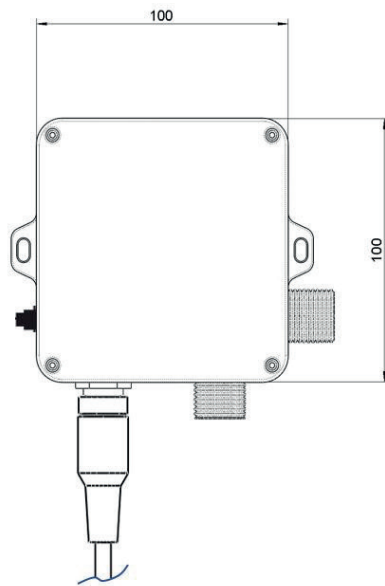
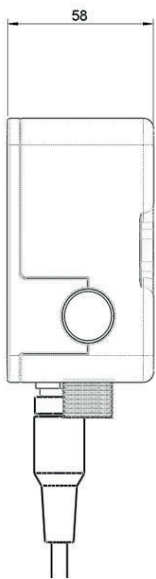


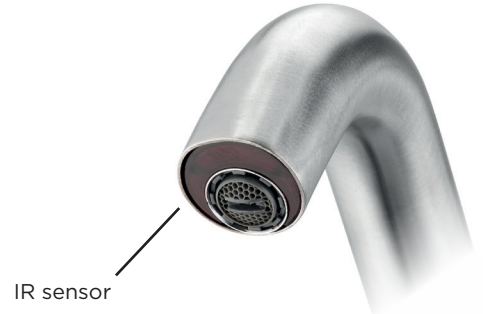

# JEE-O cone touchless wall basin tap

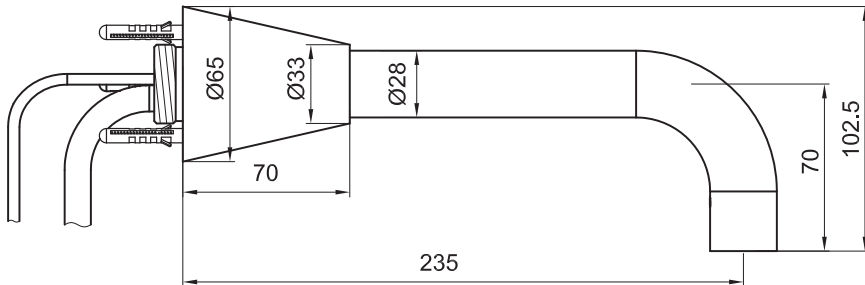

Article code:

900-1530

● Brushed

900-1536

● PVD coated gun metal

Material:

Stainless Steel r304

Cleaning instructions:

download JEE-O shower and taps manual on our website: [www.jee-o.com](http://www.jee-o.com)

Cartridge:

sedal ired+ electronic infrared operated valve

Flow at water of 38°C:

10L p/m at 3Bar pressure

Pressure:

Recommended working pressure 3Bar

Sensor (de)activation time:

<1s

Detection distance:

Minimum installation distance 200mm between spout end and basin bottom surface

Sensor cable:

appr. 120 cm length

Connection:

Thread:

Power supply:

G ½-14

British Standard Pipe (BSP)

DC 6V; AC 230 V (50Hz)/

110-120V (60Hz)

Power consumption:

standby: AC < 4W ; DC < 0.2mW

flushing: AC < 5W ; DC < 3W

4xAA 1.5V

Battery type (optional):

Dimension package:

L 39 x W 31 x H 11 cm

Total weight:

2.32 kg

Package weight:

0.38 kg

Protection against intrusion: valve IP65 and sensor IP67

7 year warranty steel parts and 1 year on electronics

The general terms and conditions can be found on our

website: [www.jee-o.com/downloads](http://www.jee-o.com/downloads)

HS Code :

8481801190

Approvals:

WRAS 2307321

ACS (XP P41-280)