INEO INSTALLATION SYSTEM


Installation element for washbasin INEOLINK H910103



TECHNICAL DATA

Order no.	H910103
Specifications	Self-supporting steel frame for covering with plasterboard, installation onto a solid wall, in drywall constructions. Construction height 1120 mm. Non-slip leg supports, rotatable foot plates, height-adjustable 0-200 mm. Capable to resist 150 kg
Installation depth	75-205 mm, wall bracket adjustable without tools
Weight	8,5 kg
Mounting acc. incl.	Fastening material, 2x M10 threaded rods. Drain elbow bracket and outlet pipe Ø 40-50 mm.
Mounting acc. excl.	Commercially available wall disk 1/2”. Sound insulation set, order no. VS16032 C00 000 0
Mounting information	Please note the necessary wall thickness of 80 mm in case of pre-wall installation.
Otherwise	Compatible with U-profiles UW 50, UW 75 and the Duofix*-System (*are registered third party trademarks)
Colours	Surface powder coated

TECHNICAL DRAWINGS / S 1 : 20

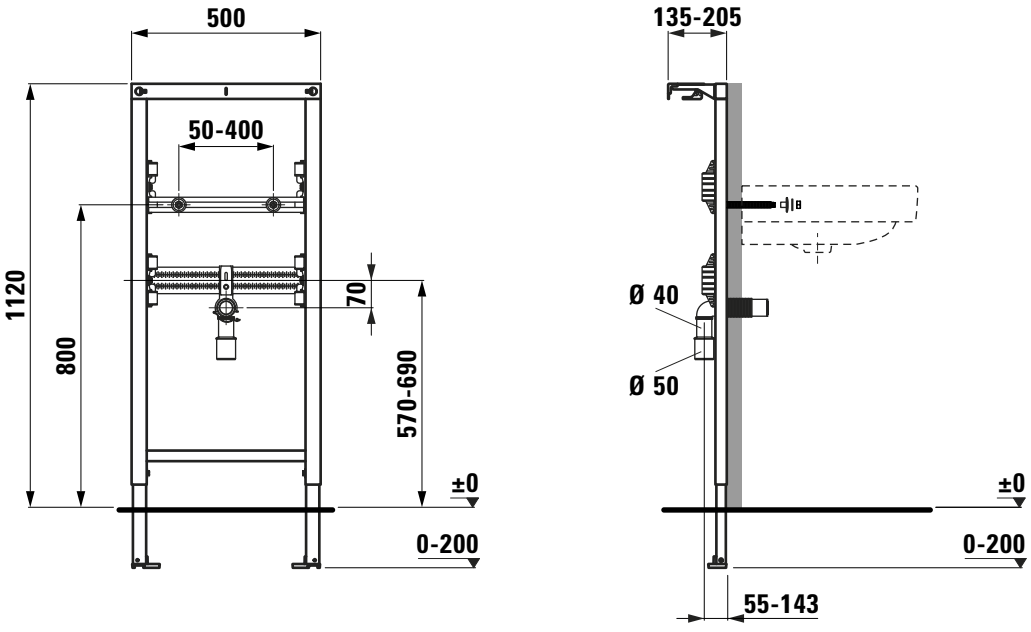

LAUFEN